

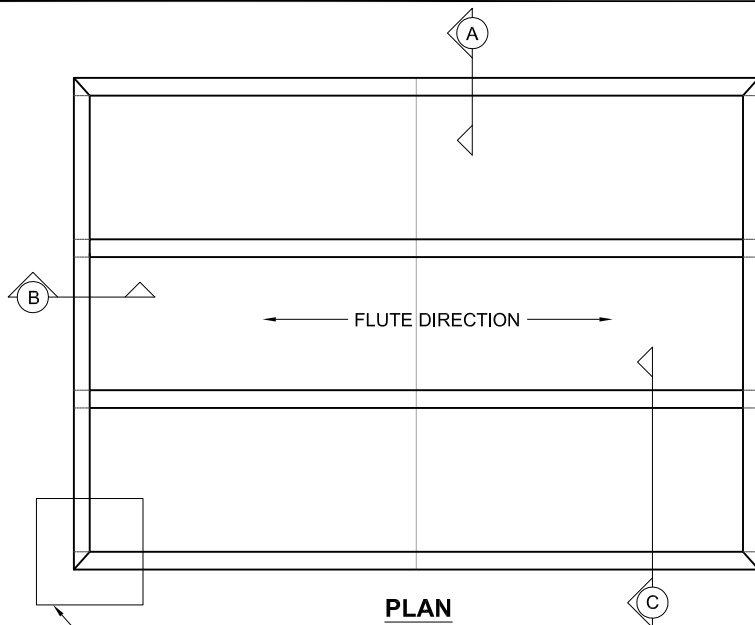


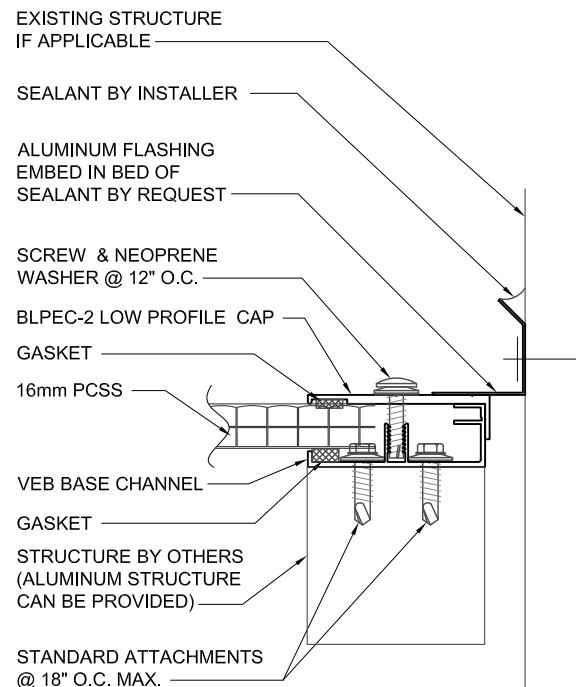

NOTE CORNER CONDITION:  
CAP(S) MITER CUT  
BASE CHANNEL SQUARE CUT

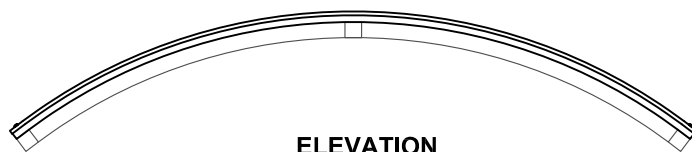

SECTION 'A'

STANDARD ATTACHMENTS:  
ALUMINUM:

#12 x 1" TEK SCREW W/ #3 TIP & NEOPRENE WASHER

STEEL:

#12 x 2" TEK SCREW W/ #5 TIP & NEOPRENE WASHER

WOOD:

1/4" x 2" LAG SCREW W/ NEOPRENE WASHER

NOTE:


ATTACHMENT METHODS & SPACING BASED ON  
STANDARD 90 MPH WIND LOAD CONDITIONS.  
CONTACT DUO-GARD TO DISCUSS ALTERNATE  
LOAD CONDITIONS.

(2) 3/8" Ø WEEP HOLES  
1" APART @ 36" O.C. MAX.  
(MIN. 1" FROM SCREWS)  
(DRILL THROUGH OUTER &  
INNER WALLS AS SHOWN)


ALUMINUM FLASHING  
EMBED IN BED OF  
SEALANT BY REQUEST

STRUCTURE BY OTHERS  
(ALUMINUM STRUCTURE  
CAN BE PROVIDED)

STANDARD ATTACHMENTS  
@ 18" O.C. MAX.

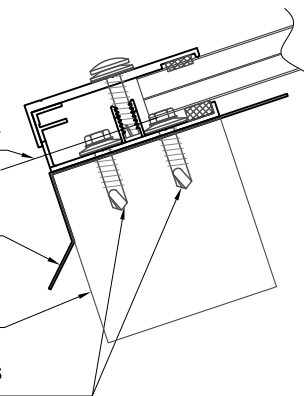

SECTION 'B'

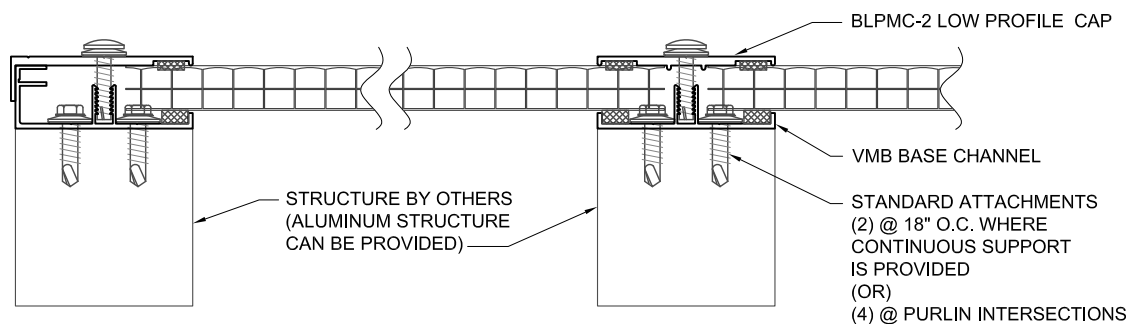

SECTION 'C'



Duo-Gard Industries, Inc.  
Tel (734) 207-9700 Fax (734) 207-7995  
www.duo-gard.com

THIS DRAWING IS PROPRIETARY AND FOR THE SOLE USE OF OUR  
CUSTOMER AND MAY NOT BE COPIED OR REPRODUCED WITHOUT  
PRIOR WRITTEN CONSENT FROM DUO-GARD INDUSTRIES, INC.  
LEAD TIME BEGINS UPON RECEIPT OF SIGNED SHOP DRAWINGS

DESCRIPTION

SERIES 3000 BPC

SYSTEM 3216-3W

| DWN BY | DRW'G DATE | SCALE | PAGE | OF | DRWNG #                |
|--------|------------|-------|------|----|------------------------|
| JL     | 6/15/16    | NTS   | 1    | 1  | 3216-3W G-16-3W CURVED |