


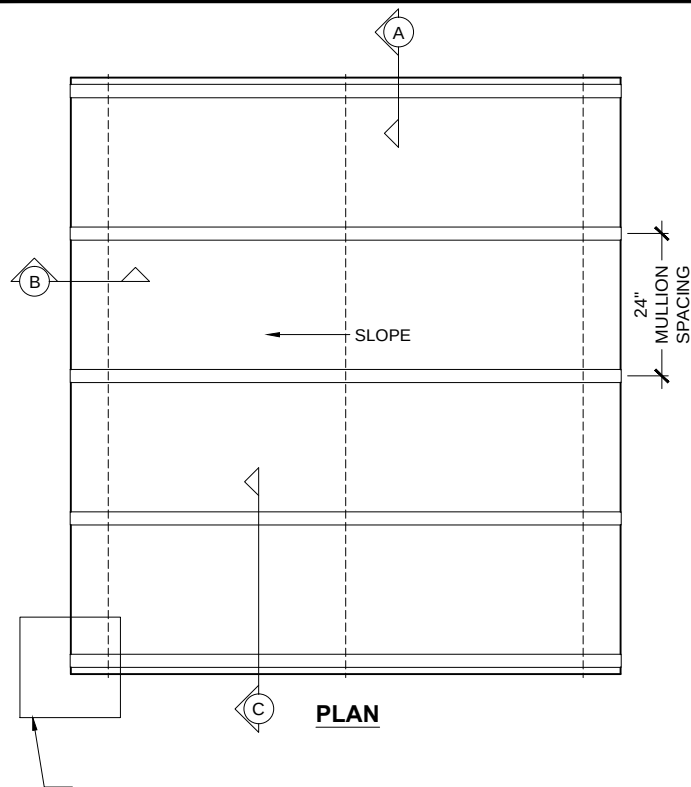

SCREW & NEOPRENE WASHER @ 12" O.C.

CAP
GASKET

3/8" SOLID POLYCARBONATE

GASKET




INSERT

BASE CHANNEL

STANDARD ATTACHMENT LOCATION @ AVAILABLE SUPPORT

STRUCTURE BY OTHERS OR AVAILABLE BY REQUEST

SECTION 'A'

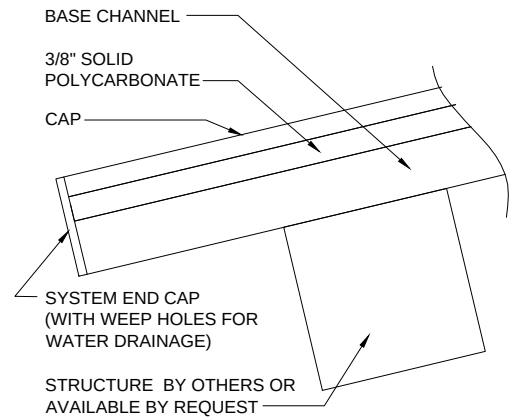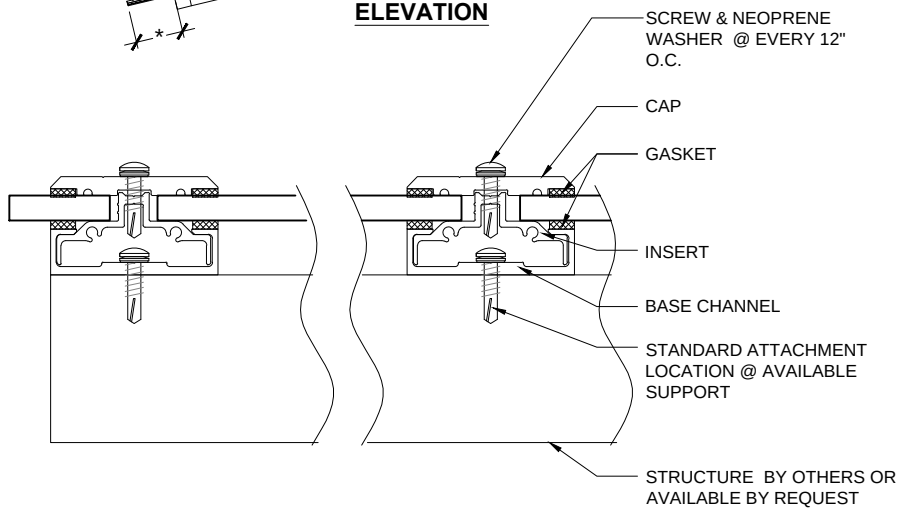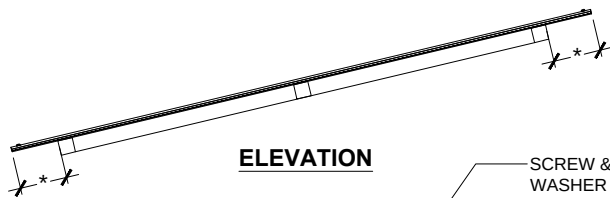

STANDARD ATTACHMENT: _____

ALUMINUM:

#12 x 1" TEK SCREW W/ #3 TIP & NEOPRENE WASHER

STEEL:

#12 x 1 1/2" TEK SCREW W/ #5 TIP & NEOPRENE WASHER

WOOD:

1/4" x 2" LAG SCREW W/ NEOPRENE WASHER

NOTE:

ATTACHMENT METHODS & STRUCTURAL SPACING BASED ON A STANDARD 20 p.s.f. COMBINED LOAD. CONTACT DUO-GARD TO DISCUSS CONDITIONS OUTSIDE OF THOSE PARAMETERS.

*CANTILEVER VARIES BASED ON DESIGN LOADS

DUO-GARD
FORGE AHEAD[®]

Duo-Gard Industries, Inc.
Tel (734) 207-9700 Fax (734) 207-7995
www.duo-gard.com

THIS DRAWING IS PROPRIETARY AND FOR THE SOLE USE OF OUR CUSTOMER AND MAY NOT BE COPIED OR REPRODUCED WITHOUT PRIOR WRITTEN CONSENT FROM DUO-GARD INDUSTRIES, INC.
LEAD TIME BEGINS UPON RECEIPT OF SIGNED SHOP DRAWINGS

DESCRIPTION

SERIES 3900 SLEEKLINE

SYSTEM 3938 SBC-1

DWN BY	DRW'G DATE	SCALE	PAGE	OF	DRWNG #
UH	02/22/17	NTS	1	1	3938-SBC1 A-.375-SS SLOPED