


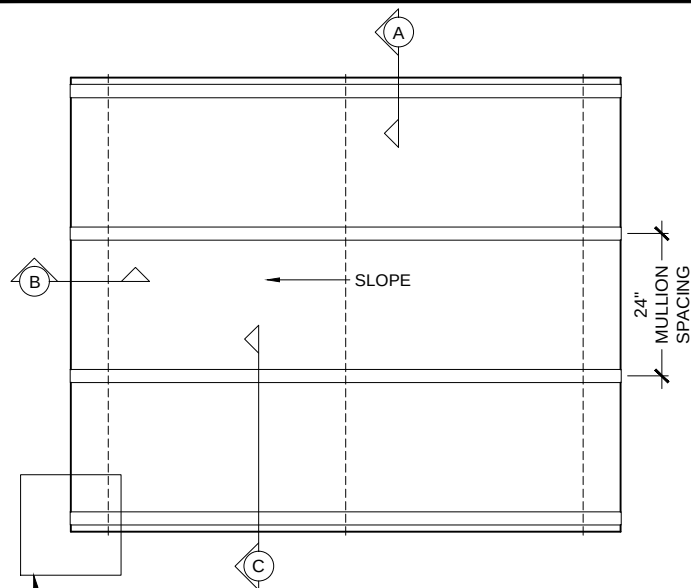

NOTE CORNER CONDITION:
CAP(S) SQUARE CUT
BASE CHANNEL SQUARE CUT

PLAN

SCREW & NEOPRENE
WASHER @ 12" O.C.

CAP

GASKET

1/2" SOLID
POLYCARBONATE

GASKET

INSERT


BASE CHANNEL

ALUMINUM TUBE

STANDARD ATTACHMENT
LOCATION @ AVAILABLE
SUPPORT

SLOPED PURLIN BY OTHERS OR
AVAILABLE BY REQUEST

SECTION 'A'

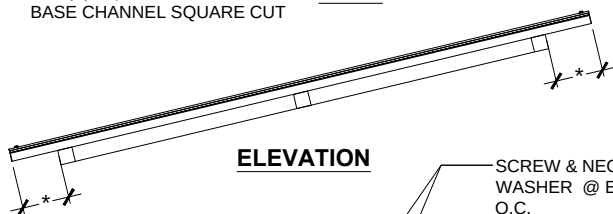

ELEVATION

SCREW & NEOPRENE
WASHER @ EVERY 12"
O.C.

CAP

GASKET

INSERT


BASE CHANNEL

ALUMINUM TUBE

STANDARD ATTACHMENT
LOCATION @ AVAILABLE
SUPPORT

SECTION 'C'

PURLIN BY OTHERS OR
AVAILABLE BY REQUEST

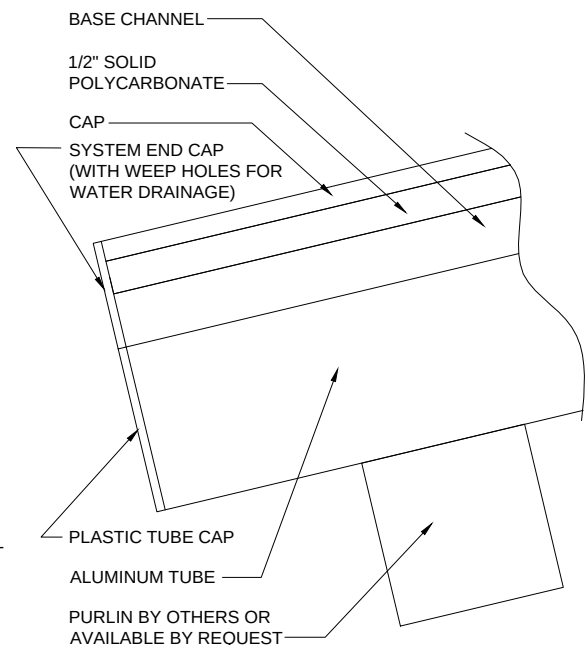

SECTION 'B'

STANDARD ATTACHMENT: _____
ALUMINUM:
#12 x 1" TEK SCREW W/ #3 TIP & NEOPRENE WASHER

STEEL:
#12 x 1 1/2" TEK SCREW W/ #5 TIP & NEOPRENE WASHER

WOOD:
1/4" x 2" LAG SCREW W/ NEOPRENE WASHER

NOTE:
ATTACHMENT METHODS & STRUCTURAL SPACING BASED
ON A STANDARD 20 p.s.f. COMBINED LOAD. CONTACT
DUO-GARD TO DISCUSS CONDITIONS OUTSIDE OF THOSE
PARAMETERS.

*CANTILEVER VARIES BASED ON DESIGN LOADS



Duo-Gard Industries, Inc.
Tel (734) 207-9700 Fax (734) 207-7995
www.duo-gard.com

THIS DRAWING IS PROPRIETARY AND FOR THE SOLE USE OF OUR
CUSTOMER AND MAY NOT BE COPIED OR REPRODUCED WITHOUT
PRIOR WRITTEN CONSENT FROM DUO-GARD INDUSTRIES, INC.
LEAD TIME BEGINS UPON RECEIPT OF SIGNED SHOP DRAWINGS

DESCRIPTION

SERIES 3900 SLEEKLINE

SYSTEM 3950 SBC-2

DWN BY	DRWG DATE	SCALE	PAGE	OF	DRWNG #
UH	02/23/17	NTS	1	1	3950-SBC2 A-5-SS SLOPED