


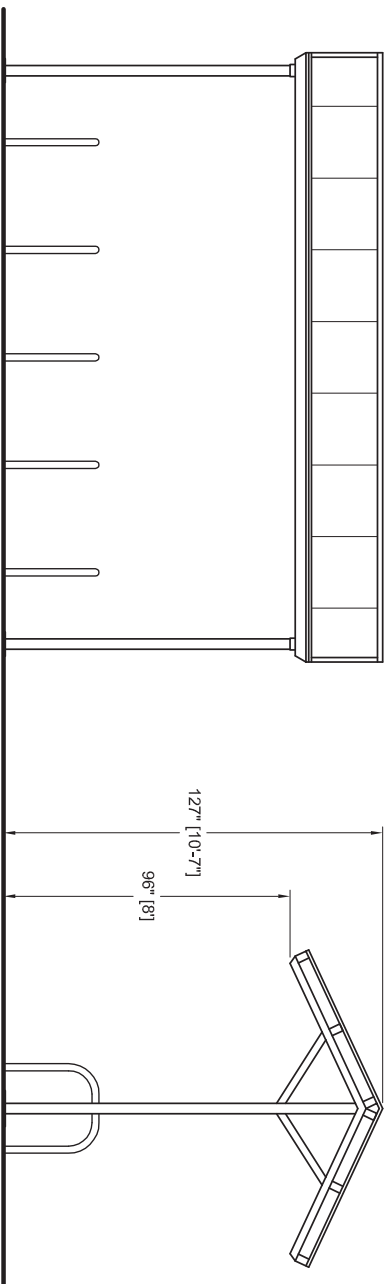


- NOTES:
- FRAMEWORK TO BE WELDED AND MECHANICALLY FASTENED STEEL
 - ALL FASTENERS TO BE STAINLESS STEEL
 - ROOF GLAZING TO BE: 8MM POLYCARBONATE STRUCTURED SHEET, TONGUE AND GROOVE SYSTEM, IN ALUMINUM TRIM, TINT:
 - STEEL FINISHING:
 - MEDIA BLAST PREP
 - TNEMEC TNEME ZINC 90-97 PRIMER
 - TNEMEC SERIES N69 HI-BUILD EPOXOLINE 2-PART EPOXY MIDCOAT; TNEMEC SERIES 73 ENDURA-SHIELD TOPCOAT.
 - ALUMINUM TRIM TO HAVE SAME TOP TWO COATS (OR IN MATCHING ANODIZED), COLOR: _____


- ALL DIMENSIONS TO BE FIELD VERIFIED
- DESIGN IS PRELIMINARY, AND CONCEPTUAL, AND SUBJECT TO CHANGE BASED ON FINAL ENGINEERING PHASE AND CUSTOMER APPROVAL.

SIDE ELEVATION

END ELEVATION

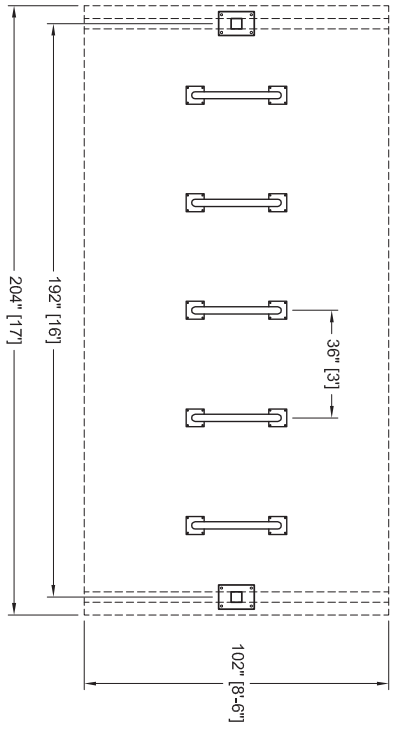

PLAN VIEW
(36" RACK SPACING)

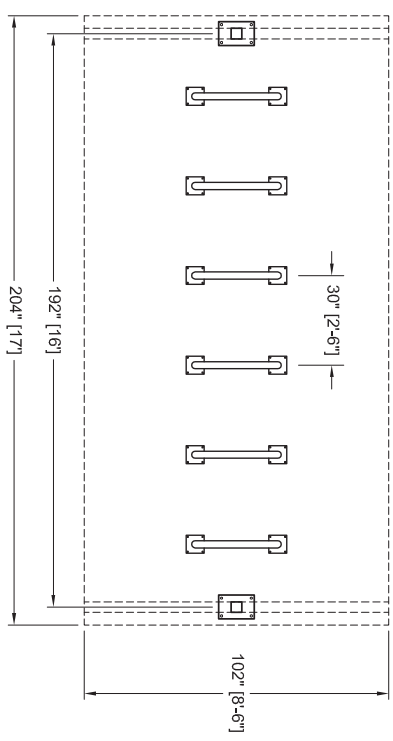

PLAN VIEW
(30" RACK SPACING)

© Design by Duo-Gard Industries, Inc., 2010



DUO-GARD

FORGE AHEAD

Duo-Gard Industries, Inc.
Tel (734) 207-9700 Fax (734) 207-7995
www.duo-gard.com

THIS DRAWING IS PROPRIETARY AND FOR THE SOLE USE OF OUR CUSTOMER AND MAY NOT BE COPIED OR REPRODUCED WITHOUT PRIOR WRITTEN CONSENT FROM DUO-GARD INDUSTRIES, INC. LEAD TIME BEGINS UPON RECEIPT OF SIGNED SHOP DRAWINGS.

APPROVAL SIGNATURE _____ DATE _____

X _____

PROJECT NAME									
CUSTOMER SAMPLE									
DESCRIPTION									
9' x 16' "APEX" BICYCLE SHELTER, PLAN AND ELEVATION DETAILS									
PRJT ENG	PRJT MGR	DRFTR	DRWG DATE	REV1	REV2	SCALE	PAGE	OF	DRWG #
BDI	SM	GS	12.17.2014			3/16" = 1'-0"	1	1	916APEX

BIKE DOCK CAPACITY		
RACK SPACING	# OF RACKS	# OF BIKES
36"	5	10
30"	6	12