



SIDE ELEVATION

BR118 RACK w/ HDPE
PROTECTIVE WRAP

END ELEVATION

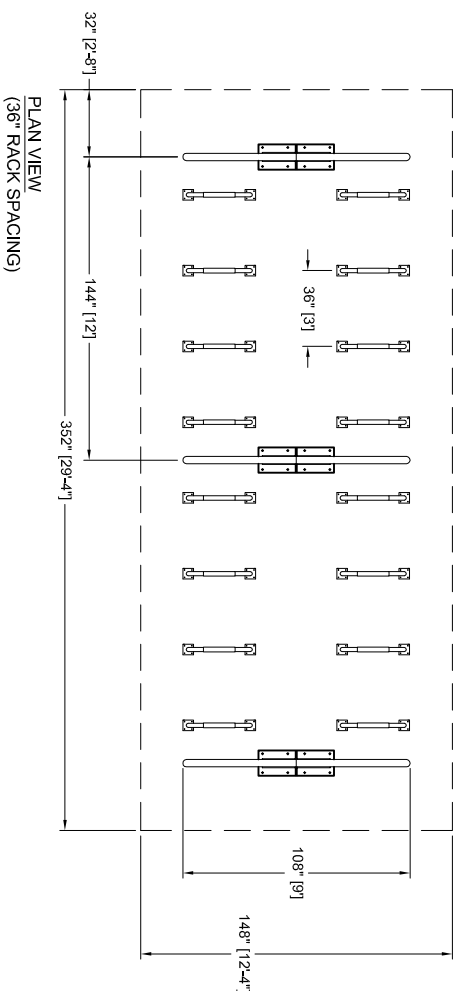

PLAN VIEW
(36" RACK SPACING)

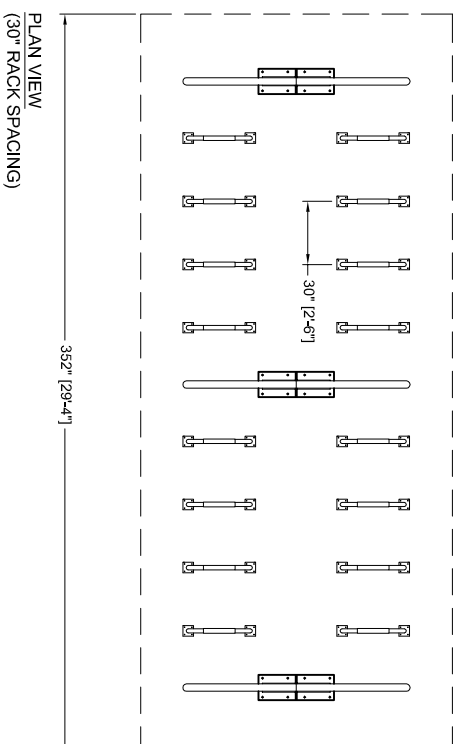

PLAN VIEW
(30" RACK SPACING)

- NOTES:
- FRAMEWORK TO BE WELDED AND MECHANICALLY FASTENED STEEL
 - ALL FASTENERS TO BE STAINLESS STEEL
 - ROOF GLAZING TO BE: 8MM POLYCARBONATE STRUCTURED SHEET, BATTEN STYLE SYSTEM, IN ALUMINUM TRIM, TINT: _____
 - STEEL FINISHING:
 - MEDIA BLAST PREP
 - TNEMEC TNEME ZINC 90-97 PRIMER
 - TNEMEC SERIES N69 H-BUILD EPOXOLINE 2-PART EPOXY MIDCOAT;
 - TNEMEC SERIES 73 ENDURA-SHIELD TOPCOAT;
 - ALUMINUM TRIM TO HAVE SAME TOP TWO COATS (OR IN MATCHING ANODIZED), COLOR: _____
 - ALL DIMENSIONS TO BE FIELD VERIFIED
 - DESIGN IS PRELIMINARY, AND CONCEPTUAL, AND SUBJECT TO CHANGE BASED ON FINAL ENGINEERING PHASE AND CUSTOMER APPROVAL.

BIKE DOCK CAPACITY			
RACK SPACING	# OF RACKS	# OF BIKES	
36"	16	32	
30"	16	32	



DUO-GARD
FORGE AHEAD.

Duo-Gard Industries, Inc.
Tel (734) 207-9700 Fax (734) 207-7995
www.duo-gard.com

PROJECT NAME

CUSTOMER SAMPLE

DESCRIPTION

12 X 29 "OASIS" BICYCLE SHELTER, PLAN AND ELEVATION DETAILS

PRJTG ENG	PRJTG MGR	DRFTR	DWG DATE	REV1	REV2	SCALE	PAGE	OF	DRWG #
BDI	SM	GS	9.1.2016			1/8" = 1'-0"	1	1	1229OASIS